


built-in light

## Jazz XL LED


AVA TECH

Type of luminaire	built-in light
Application areas	general and accent lighting
Mounting	spring bracket (mounting diameter 205 mm)
Supply unit	LED Driver integrated (LED Driver DALI on request)
Nominal voltage	220V, 50Hz
System performance	26 W, 40 W
Lighting technology	LED COB
Optic	Aluminum reflector
Beam angle	65°
Luminous Flux	3400 - 5250 lm
Light colour	2700 K, 3000 K, 4000 K, 5000 K
CRI	80 - 90
Power factor	0,95
Protection rating	IP20
Cooling	passive
Body	Cast aluminum
Body colour	black, white, Special colours on request
Weight	1,08 kg
Life time warranty	50 000 hours. 5 years/50 000 hours
Certificates	UA, CE

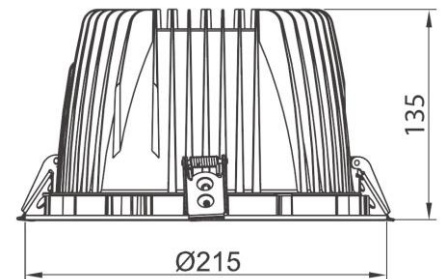

Dimensions

### Beam angle options



JazzXL65 LED

## Jazz XL LED

AVA TECH

### Ordering information

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 ° C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra > 80 / > 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.

Model	Beam angle	System performance	CRI	Light colour White	Luminous Flux
65 LED 26W/827 W	65°	26 W	80	2700 K	2423 lm
65 LED 26W/827 B					
65 LED 26W/830 W	65°	26 W	80	3000 K	2901 lm
65 LED 26W/830 B					
65 LED 26W/840 W	65°	26 W	80	4000 K	3413 lm
65 LED 26W/840 B					
65 LED 26W/850 W	65°	26 W	80	5000 K	3413 lm
65 LED 26W/850 B					
65 LED 40W/827 W	65°	40 W	80	2700 K	3728 lm
65 LED 40W/827 B					
65 LED 40W/830 W	65°	40 W	80	3000 K	4463 lm
65 LED 40W/830 B					
65 LED 40W/840 W	65°	40 W	80	4000 K	5250 lm
65 LED 40W/840 B					
65 LED 40W/850 W	65°	40 W	80	5000 K	5250 lm
65 LED 40W/850 B					
65 LED 26W/927 W	65°	26 W	90	2700 K	2116 lm
65 LED 26W/927 B					
65 LED 26W/930 W	65°	26 W	90	3000 K	2559 lm
65 LED 26W/930 B					
65 LED 26W/940 W	65°	26 W	90	4000 K	2986 lm
65 LED 26W/940 B					
65 LED 26W/950 W	65°	26 W	90	5000 K	2986 lm
65 LED 26W/950 B					
65 LED 40W/927 W	65°	40 W	90	2700 K	3255 lm
65 LED 40W/927 B					
65 LED 40W/930 W	65°	40 W	90	3000 K	3938 lm
65 LED 40W/930 B					
65 LED 40W/940 W	65°	40 W	90	4000 K	4594 lm
65 LED 40W/940 B					
65 LED 40W/950 W	65°	40 W	90	5000 K	4594 lm
65 LED 40W/950 B					

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 ° C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra > 80 / > 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.